


SM 25 HP/AP

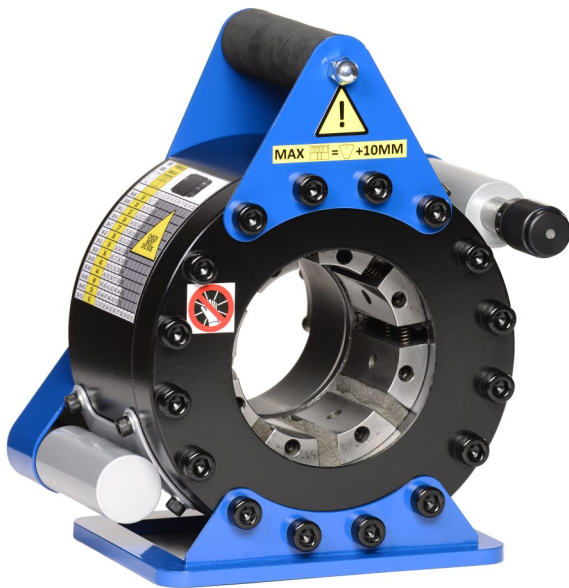

TECHNICAL SPECIFICATIONS

Max hose size	1" 4 SH, 1 1/2"
Crimping force (kN):	1200
Max ferrule diameter (mm):	61
Max opening diameter (mm):	die diameter + 23
Actuation / HP model:	Two-speed hand pump
Actuation / AP model	Air pressure
Control :	Micrometer with led
Master dies opening / Length (mm):	98/64,5
Crimping range (mm):	6 – 61
Crimping unit weight (kg)	25
Crimping unit dimensions (LxWxH mm)	230 x 200 x 275

STANDARD DIE SETS

	Range (mm)	Length
38-06	6-8	45
38-08	8-11	45
38-11	11-14	45
38-14	14-17	45
38-17	17-20	45
38-20	20-23	55
38-23	23-26	55
38-26	26-30	55
38-30S	30-34	60
38-34S	34-39	60
38-39S	39-45	65
38-45S	45-51	65
38-51S	51-61	65

HAND PUMP / AIR PUMP

